



CP-RX250 XGA 2700 ANSI LUMENS

Convenient Functions

- 215W UHO Lamp, XGA resolution
- Built-in 1W Speaker, Standby Audio
- Direct Power On/Off
- Equalizing Gamma / Color Temperature
- Template Function
- Projector Control with RS-232C commands
- High Performance Air Filter (Up to 5,000hour*) without cleaning

Lamp Power saving mode

- Intelligent Eco
- Eco Mode
- Saver Mode

Installation Flexibility

- x1.2 Optical Zoom
- Vertical Keystone
- Ceiling Mount / Desk Top Installation



Versatile Security Functions

- PIN Lock, Security Bar / Security Slot, Key Lock

*Varies according to usage environment

LCD Projectors

Specifications	
Model name	CP-RX250EF
Product name	Liquid crystal projector 3LCD
Liquid crystal panel	768,431 pixels (1024 x 768)
Lamp	215W UHP
Light output (brightness)	2700lm
Contrast ratio (Presentation mode)	2000:1
Speaker	1W
Display resolution video	NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43, 525i(480i), 525p(480p), 625i(576i)
Power supply / Rated current	AC 100V-120V / 3.3A AC220-240V / 1.6A
Power consumption	320W
Temperature range	5~35°C
Dimensions (WxHxD)	320 x 85 x 245 mm
Weight (mass)	3.0 kg
Terminals	Computer In 15-pin Mini-D-sub x 1 Computer Out No Composite video In RCA connector x 1 Control (RS232C) D-sub 9-pin connector x 1 Audio In 3.5mm stereo mini con. x 1
Other	Lamp life 6000 / 5000 hr Filter cleaning cycle 5000 hr Altitude up to 10,000 feet
Operation parts	
Lamp	DT01431

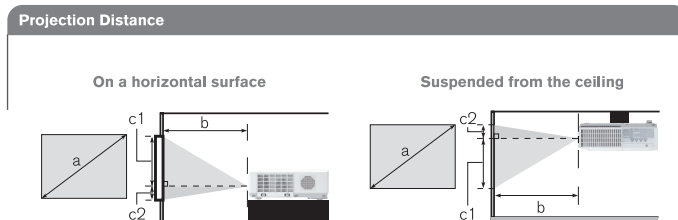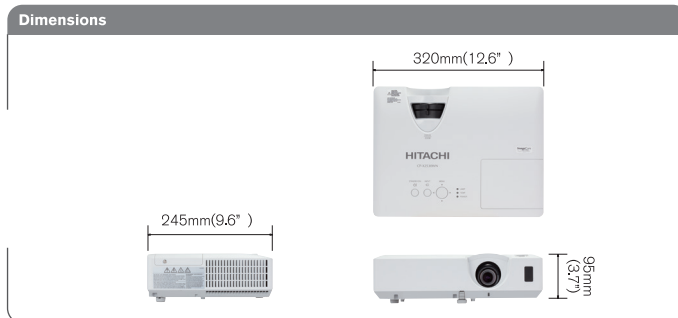

(1280 x 800) (±10%)

Screen size (diagonal) type	16:10								4:3								
	Projection distance				c1 Screen height		c2 Screen height		Projection distance				c1 Screen height		c2 Screen height		
	min	max	min	max	cm	inch	cm	inch	min	max	min	max	cm	inch	cm	inch	
30	0.8	0.9	36	1.1	44	38	15	3	1	1.0	41	1.3	50	42	17	3	1
40	1.0	1.2	49	1.5	59	50	20	4	2	1.4	56	1.7	67	57	22	4	2
50	1.3	1.6	62	1.9	74	63	25	5	2	1.8	70	2.1	84	71	28	5	2
60	1.5	1.9	74	2.3	89	75	30	6	2	2.1	84	2.6	101	85	33	7	3
70	1.8	2.2	87	2.7	105	88	34	7	3	2.5	99	3.0	119	99	39	8	3
80	2.0	2.5	99	3.0	120	100	39	8	3	2.9	113	3.4	136	113	45	9	3
90	2.3	2.8	112	3.4	135	113	44	9	3	3.2	127	3.9	153	127	50	10	4
100	2.5	3.2	125	3.8	150	125	49	10	4	3.6	142	4.3	170	142	56	11	4
120	3.0	3.8	150	4.6	181	150	59	12	5	4.3	170	5.2	205	170	67	13	5
150	3.8	4.8	188	5.7	226	188	74	14	6	5.4	213	6.5	256	212	84	16	6
200	5.1	6.4	251	7.7	302	250	98	19	8	7.2	285	8.7	342	283	111	22	9
250	6.4	8.0	315	9.6	378	313	123	24	9	9.1	357	10.9	428	354	139	27	11
300	7.6	9.6	378	11.5	454	375	148	29	11	10.9	428	13.1	514	425	167	33	13

Terminals

CP-RX250

